# APC Photocell

The APC provides the ability to control the switching of lighting in hazardous areas, without the need for major rewiring of existing circuits. Based on Abtech's proven BPG enclosure range, the photocell combines tried and tested circuitry with superior ingress and UV protection.

- Reduce carbon emissions and running costs by switching off lighting automatically when a specific light level is reached
- Standard switching level is 70 lux
- Built in delay of 25 seconds to prevent nuisance switching










#### Luminaire Ratings


| Product Reference | Load Types               | Current<br>Rating (A) | Light Level<br>(lux) | Temperature<br>Rating* | Ambient<br>Temperature* | Weight<br>(kg) |
|-------------------|--------------------------|-----------------------|----------------------|------------------------|-------------------------|----------------|
| LX1APC104M20      | Resistive &<br>Inductive | 10                    | 70*                  | T6                     | -40°C to 55°C           | 2.0            |

<sup>\*</sup>Alternative switching levels are available; refer to table on page 2

#### Standard Specifications

| Luminaire Type      | Zone 1 photocell   |  |  |  |
|---------------------|--|--|--|--|
| Ingress Protection  | IP66/67 to EN60529   |  |  |  |
| Material            | Glass reinforced polyester housing, polycarbonate sensor window, stainless steel fixings |  |  |  |
| Lamp Types          | Suitable for use with all lamp types, resistive and inductive loads                      |  |  |  |
| Cable Entry         | 4 x M20 tapped entries. Supplied with 4 x Ex plugs                                       |  |  |  |
| Terminals           | Terminals block for up to 6mm² conductors  |  |  |  |
| Control Gear        | Electronic with on load switching up to 10A  |  |  |  |
| Orientation         | Universal  |  |  |  |
| Mounting            | Via rear mounting holes  |  |  |  |
| Supply              | 110 to 254V 50/60Hz  |  |  |  |
| Certification       |  |  |  |  |
| Area Classification | Zone 1 & 21, Gas and Dust  |  |  |  |
| Type of Protection  | Ex e mb (increased safety, encapsulation)  |  |  |  |
| Apparatus Coding    | II 2 GD Ex e mb IIC T6 Gb, Ex tb IIIC T80ºC Db   |  |  |  |
| Certificate Number  | SIRA 10ATEX5274X / IECEx SIR 10.0171X  |  |  |  |

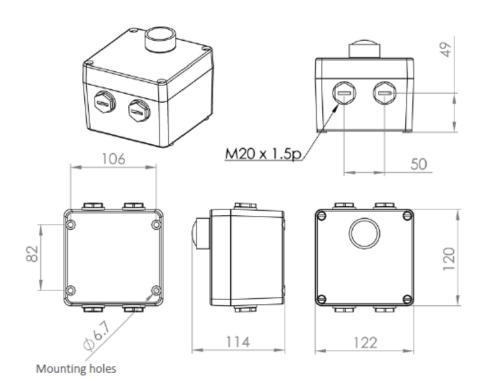

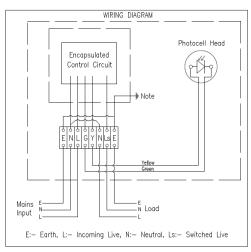

#### Switching

| ON              | OFF     |          |          |         |         |  |  |  |
|-----------------|---------|----------|----------|---------|---------|--|--|--|
| Switching Ratio | 1:1     | 1:0.5    | 1:1.5    | 1:2     | 1: 3    |  |  |  |
| 70 lux          | 70 lux  | 35 lux   | 105 lux  | 140 lux | 210 lux |  |  |  |
| 18 lux          | 18 lux  | 9 lux    | 27 lux   | 36 lux  | 54 lux  |  |  |  |
| 55 lux          | 55 lux  | 27.5 lux | 82.5 lux | 110 lux | 165 lux |  |  |  |
| 100 lux         | 100 lux | 50 lux   | 150 lux  | 200 lux | 300 lux |  |  |  |

Standard switching is 70 lux with a 1:1 on/off ratio

## Options

Lxx/Ratio Non-standard lighting level (e.g. L18/115 = 18 lux, on/off ratio 1 : 1.5)

Add the required suffix to the product reference.

### Accessories

LX4APC-MF External mounting feet

ABDS0125 - Rev 01 Release Date: 08/12/2025